



ADVANCED FLUID  
MANAGEMENT SOLUTIONS

**RAASM S.p.a.**

Via Marangoni 33, 36022  
S. Zeno di Cassola (VI) Italy  
Tel. +39 0424 570891  
info@raasm.com

## P/N 63095

Pneumatic piston pump s. 700, R 65:1 - 1900 g/min,  
with PU seals and suction tube 940 mm

### AREAS OF USE


Aeronautics, Agriculture, Automotive, Building and road  
construction, Railway transport

### FEATURES

Flow rate	1900 g/min
Ratio	65:1
Compatible fluids	greases, medium/high viscosity
Suction tube upper body	aluminum
Suction tube	carbon steel
Air inlet connection	G 1/4" (f)
Fluid outlet connection	G 3/8" (f)
Air working pressure	6 ÷ 8 bar
Average air consumption	440 l/min
Noise level	81 dB
Air max pressure	8 bar
Suitable for drums	180 ÷ 220 kg
Pump	-
Hose reels	-
Gun	-
Drum cover	-
Follower plate	-
Grease connection hose	-
Nipple	-



### OVERALL DIMENSIONS (mm)

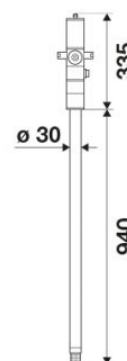

Drip-tray	-
Packing	No. 1 - 0,020 m3
Weight	8,2 kg